


Recuperated Gas Burner in Steel Design

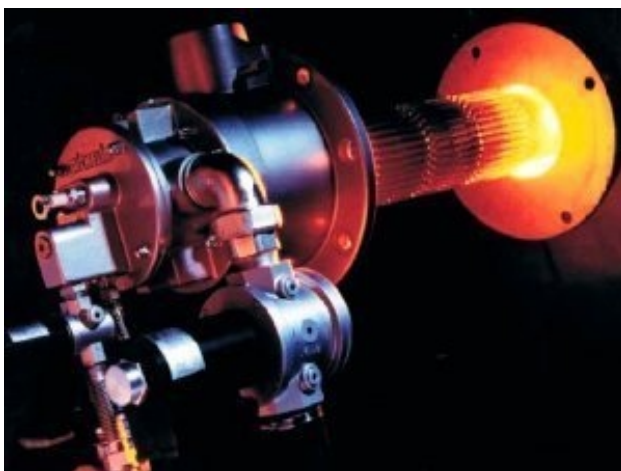

NOXMAT® RHGB
7- 160 kW

for indirect
heating of
industrial furnaces

NOXMAT[®] RHGB recuperated gas burner

Features

- High-velocity burner with integral recuperator for heat recovery
- Multi-stage combustion
- Separate cooling air connection possible
- Compact unit in modular construction
- Waste gas fitting, air and gas supply lines are situated on different levels and can be positioned 90° to each other
- Burner control for automatic burner operation
- Direct flame monitoring: up to 1150°C via ignition electrode (single-electrode ionization monitoring), up to 1300°C via UV sensor

Advantages for the system user

- Trouble-free direct ignition as well as instant burning stability
- High technical level as regards functional reliability, energy utilization, emission of harmful substances and sound level
- Large variety of possible waste gas, gas and air connections
- Ease of maintenance thanks to simple construction modules

Technical data

Burner size RHGB		15-100	15	20	25	40	80	160
Nominal capacity	[kW]	15	15	20	25	40	80	160
Minimum capacity	[kW]	7	7	10	13	25	40	80
Nominal connected gas pressure	[kPa]	5	5	5	5	5	5	5
Nom. conn. air pressure (indir. heating)	[kPa]	6	6	6	6	8	6	8
Weight	[kg]	29	35	35	51	51	76	105
Maximum recuperator temperature	[°C]	1150	1150	1150	1150	1150	1150	1150
Fuel gas	Erdgas, Flüssiggas, Sondergas auf Anfrage							
Nominal diameter gas connection	DN	15	15	15	15	15	15	20
Nominal diameter comb.air conn.	DN	25	25	25	25	25	40	50
Nom. dia. cooling air connection	DN	25	25	25	40	40	40	50

The burners comply with German regulations regarding harmful emissions (Technical Acceptance Specifications - Air 07/2002). Subject to technical changes.

[Http://www.noxmat.de](http://www.noxmat.de)
[Http://www.aichelinusa.com](http://www.aichelinusa.com)

AICHELIN HTS, Inc.
 44170 Plymouth Oaks Blvd.
 Plymouth, MI 48170
 Phone: (734) 459-9850
 Telefax: (734) 459-9851
 E-Mail: aichelinusa@aichelinusa.com

AICHELIN Entwicklungszentrum
 und Aggregatebau GmbH
 P.O.Box 37 * D - 09567 Oederan
 Phone: +49 (37292) 65 03-0
 Telefax: +49 (37292) 42 07
 E-Mail: info@noxmat.de

